


Trimwind Stands

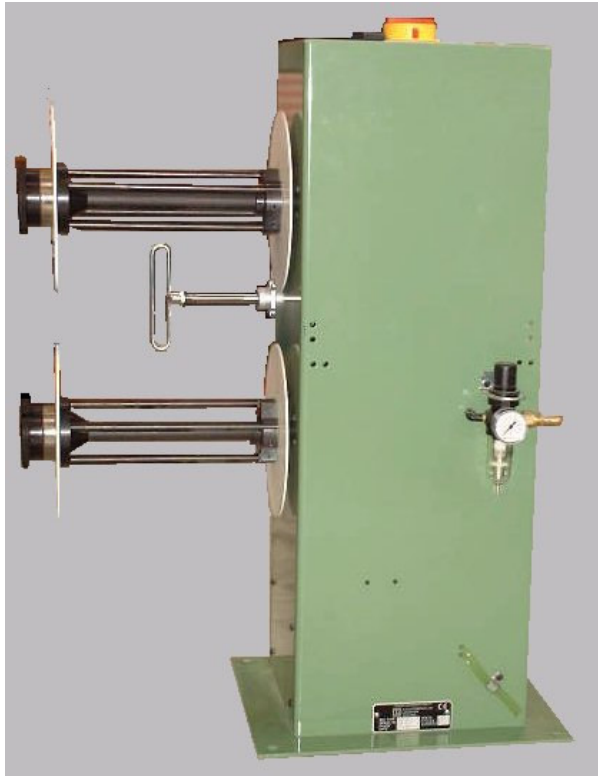

Competitively priced Trimwind stands for edge trim collection.

Machine Specification:-

- ❑ The web is wound onto a collapsible mandrel eliminating the need for cores.
- ❑ Ideal for waste recycling
- ❑ Oscillating web guidance cylinder with web overlap adjustment
- ❑ Simple torque responsive drive allows the web to control the winding speed as the rewind diameter increases.
- ❑ Tension can be easily adjusted to suit the material being wound.
- ❑ Right or left hand layout available (L.H. illustrated).
- ❑ A.C standard 240v drive.
- ❑ Specials available for higher speed operation or machine mounted applications.
- ❑ 1 or 2 collapsible mandrels – 80mm diameter.
- ❑ Rewind diameter 300mm x 230mm wide.
- ❑ Standard maximum line speed versions available 53, 85 or 110 metres per minute


- ❑ 230 volts 50/60 Hz single phase 3 Amp power supply.
- ❑ Compressed air 2 cu.ft per minute at 40 p.s.i (6 bar).

- ❑ Machine base 400mm x 360mm.


Machine features.



Simple controls.

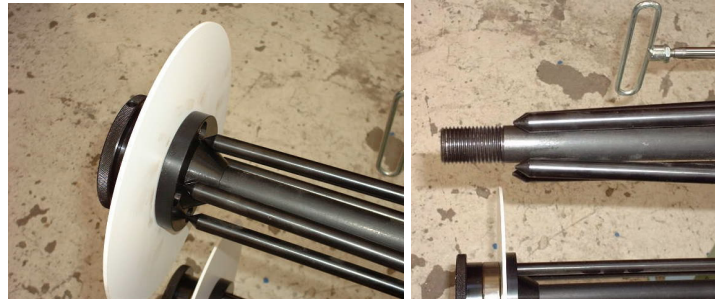

1 or 2 collapsible mandrels.

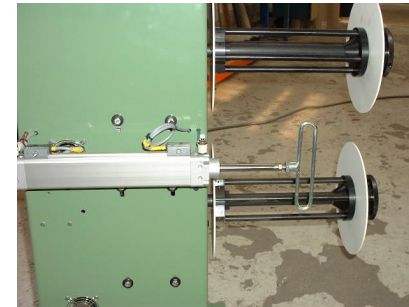

Web guidance cylinder.



Converting Equipment Ltd

CG Automatic Converting Equipment Ltd

8 Highmeres Rd
Leicester LE4 9LZ
England

Ph +44 116 2760206 Fax +44 116 2742995

Designing, Manufacturing & Supplying

Slitting, Rewinding, Coreless rewinding, Prestretch, Perforators &
Special Purpose Machines.

sales@cga-converting.com / www.cga-converting.com