


MkV Perforating Machine.


A machine for the conversion of various food grade films, based around the popular MKV rewind slitting machine.

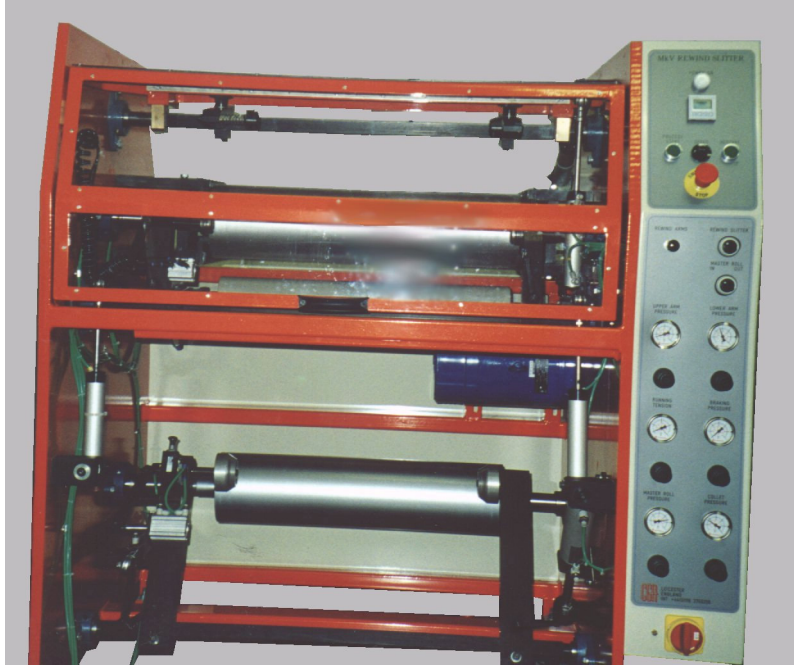


Machine Specification:-

- ❑ Variable speed AC 1.5 KW drive up to 400 metres / minute.
- ❑ Fixed tension wind with quick release belt also allowing adjustable pneumatic tension control.
- ❑ Front loading parent roll which allows the film to be threaded quickly.
- ❑ Maximum parent roll 500mm diameter x 600mm wide as standard.
- ❑ Knife perforating rollers supplied to pitch required 100-600 mm.
- ❑ Quick release pneumatic perforator roll holding to allow fast change over of perforator rollers, manually adjusted knife contact pressure.
- ❑ Polyurethane coated perforator anvil roller.
- ❑ Top arm station available to allow slitting with the removal of the perforator rolls.
- ❑ Optional air assisted rewind arms.
- ❑ Maximum rewind roll diameter 280mm.
- ❑ Rewind collet sizes from 25mm to 76mm.
- ❑ Optional roll loading trolley available.
- ❑ Programmable counter for accurate rewind length.
- ❑ Guarding to suit current C.E regulations.


Machine Features.

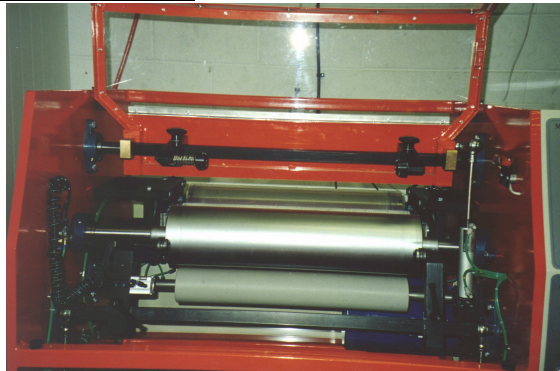

Top arm station for slitting.

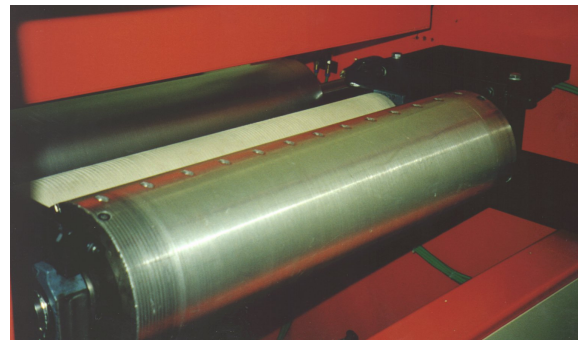

Easy to remove perforator roller.

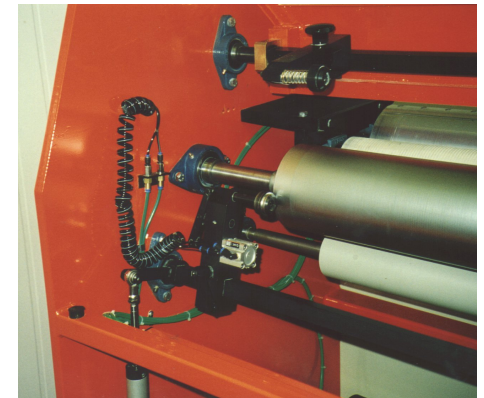

Front arm air assisted collets.



CG Automatic Converting Equipment Ltd

8 Highmeres Rd
Leicester LE4 9LZ
England

Ph +44 116 2760206 Fax +44 116 2742995

Designing, Manufacturing & Supplying

Slitting, Rewinding, Coreless rewinding, Prestretch, Perforators &
Special Purpose Machines.

sales@cga-converting.com / www.cga-converting.com